

Week 5 Data Link Layer



*Computer Networking:
A Top Down Approach
Featuring the Internet,
2nd edition.
Jim Kurose, Keith Ross
Addison-Wesley, July
2002.*

These slides are modified from the slides
made available by Kurose and Ross.

Week 5: DataLink Layer 5a-1

Chapter 5: The Data Link Layer

Our goals:


- understand principles behind data link layer services:
 - error detection, correction
 - sharing a broadcast channel: multiple access
 - link layer addressing
 - reliable data transfer, flow control: *done!*
- instantiation and implementation of various link layer technologies

Week 5: DataLink Layer 5a-2

Link Layer: Introduction

Some terminology:

- hosts and routers are **nodes** (bridges and switches too)
- communication channels that connect adjacent nodes along communication path are **links**
 - wired links
 - wireless links
 - LANs

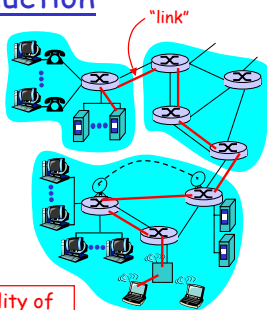

data-link layer has responsibility of transferring datagram from one node to adjacent node over a link

Week 5: DataLink Layer 5a-3

Link layer: context

- Datagram transferred by different link protocols over different links:
 - e.g., Ethernet on first link, frame relay on intermediate links, 802.11 on last link
- Each link protocol provides different services
 - e.g., may or may not provide rdt over link

transportation analogy

- trip from Rochester to Lausanne
 - car: Rochester to bus station
 - Bus: from Roch. bus station to JFK
 - plane: JFK to Geneva
 - train: Geneva to Lausanne
- tourist = **datagram**
- transport segment = **communication link**
- transportation mode = **link layer protocol**
- travel agent = **routing algorithm**

Week 5: DataLink Layer 5a-4

Link Layer Services

- **Framing, link access:**
 - encapsulate datagram into frame, adding header, trailer
 - channel access if shared medium
 - 'physical addresses' used in frame headers to identify source, dest
 - different from IP address!
- **Reliable delivery between adjacent nodes**
 - we learned how to do this already (chapter 3)!
 - seldom used on low bit error link (fiber, some twisted pair)
 - wireless links: high error rates
 - Q: why both link-level and end-end reliability?


Week 5: DataLink Layer 5a-5

Link Layer Services (more)

- **Flow Control:**
 - pacing between adjacent sending and receiving nodes
- **Error Detection:**
 - errors caused by signal attenuation, noise.
 - receiver detects presence of errors:
 - signals sender for retransmission or drops frame
- **Error Correction:**
 - receiver identifies **and corrects** bit error(s) without resorting to retransmission
- **Half-duplex and full-duplex**
 - with half duplex, nodes at both ends of link can transmit, but not at same time

Week 5: DataLink Layer 5a-6

Adaptors Communicating

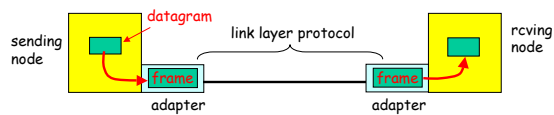


- link layer implemented in "adaptor" (aka NIC)
 - Ethernet card, PCMCIA card, 802.11 card
- sending side:
 - adds error checking bits, rdt, flow control, etc.
 - encapsulates datagram in a frame
- receiving side
 - looks for errors, rdt, flow control, etc
 - extracts datagram, passes to rcvng node
- adaptor is semi-autonomous
- link & physical layers

Week 5: DataLink Layer 5a-7

Error Detection

EDC= Error Detection and Correction bits (redundancy)
D = Data protected by error checking, may include header fields


- Error detection not 100% reliable!
 - protocol may miss some errors, but rarely
 - larger EDC field yields better detection and correction

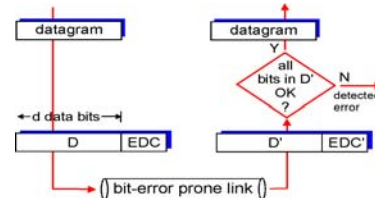


Week 5: DataLink Layer 5a-8

Parity Checking

Single Bit Parity:
Detect single bit errors



Two Dimensional Bit Parity:
Detect and correct single bit errors

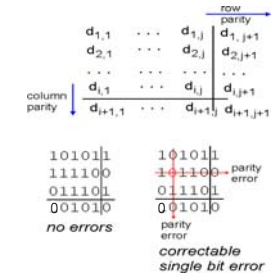

Week 5: DataLink Layer 5a-9

Internet checksum

Goal: detect "errors" (e.g., flipped bits) in transmitted segment (note: used at transport layer *only*)

Sender:

- treat segment contents as sequence of 16-bit integers
- checksum: addition (1's complement sum) of segment contents
- sender puts checksum value into UDP checksum field


Receiver:

- compute checksum of received segment
- check if computed checksum equals checksum field value:
 - NO - error detected
 - YES - no error detected. *But maybe errors nonetheless? More later*

Week 5: DataLink Layer 5a-10

Checksumming: Cyclic Redundancy Check

- view data bits, D , as a binary number
- choose $r+1$ bit pattern (generator), G
- goal: choose r CRC bits, R , such that
 - $\langle D, R \rangle$ exactly divisible by G (modulo 2)
 - receiver knows G , divides $\langle D, R \rangle$ by G . If non-zero remainder: error detected!
 - can detect all burst errors less than $r+1$ bits
- widely used in practice (ATM, HDCL)

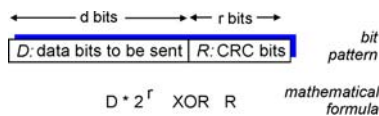

Week 5: DataLink Layer 5a-11

CRC Example

Want:

$$D \cdot 2^r \text{ XOR } R = nG$$


equivalently:

$$D \cdot 2^r = nG \text{ XOR } R$$

equivalently:

if we divide $D \cdot 2^r$ by G , want remainder R

$$R = \text{remainder} \left[\frac{D \cdot 2^r}{G} \right]$$

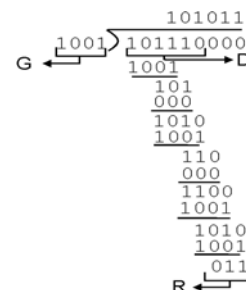


Week 5: DataLink Layer 5a-12

Multiple Access Links and Protocols

Two types of "links":

- point-to-point
 - PPP for dial-up access
 - point-to-point link between Ethernet switch and host
- **broadcast** (shared wire or medium)
 - traditional Ethernet
 - upstream HFC
 - 802.11 wireless LAN

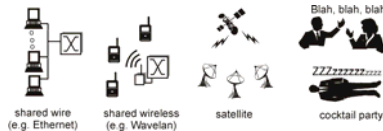

Week 5: DataLink Layer 5a-13

Multiple Access protocols

- single shared broadcast channel
- two or more simultaneous transmissions by nodes: interference
 - only one node can send **successfully** at a time
- multiple access protocol
- distributed algorithm that determines how nodes share channel, i.e., determine when node can transmit
- communication about channel sharing must use channel itself!
- what to look for in multiple access protocols:

Week 5: DataLink Layer 5a-14

Ideal Multiple Access Protocol

Broadcast channel of rate R bps

1. When one node wants to transmit, it can send at rate R .
2. When M nodes want to transmit, each can send at average rate R/M
3. Fully decentralized:
 - no special node to coordinate transmissions
 - no synchronization of clocks, slots
4. Simple

Week 5: DataLink Layer 5a-15

MAC Protocols: a taxonomy

Three broad classes:


- **Channel Partitioning**
 - divide channel into smaller "pieces" (time slots, frequency, code)
 - allocate piece to node for exclusive use
- **Random Access**
 - channel not divided, allow collisions
 - "recover" from collisions
- **"Taking turns"**
 - tightly coordinate shared access to avoid collisions

Week 5: DataLink Layer 5a-16

Channel Partitioning MAC protocols: TDMA

TDMA: time division multiple access

- access to channel in "rounds"
- each station gets fixed length slot (length = pkt trans time) in each round
- unused slots go idle
- example: 6-station LAN, 1,3,4 have pkt, slots 2,5,6 idle




Week 5: DataLink Layer 5a-17

Channel Partitioning MAC protocols: FDMA

FDMA: frequency division multiple access

- channel spectrum divided into frequency bands
- each station assigned fixed frequency band
- unused transmission time in frequency bands go idle
- example: 6-station LAN, 1,3,4 have pkt, frequency bands 2,5,6 idle

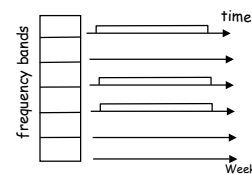

Week 5: DataLink Layer 5a-18


Channel Partitioning (CDMA)

CDMA (Code Division Multiple Access)

- unique "code" assigned to each user; i.e., code set partitioning
- used mostly in wireless broadcast channels (cellular, satellite, etc)
- all users share same frequency, but each user has own "chipping" sequence (i.e., code) to encode data
- encoded signal** = (original data) \times (chipping sequence)
- decoding**: inner-product of encoded signal and chipping sequence
- allows multiple users to "coexist" and transmit simultaneously with minimal interference (if codes are "orthogonal")


Week 5: DataLink Layer 5a-19

CDMA Encode/Decode

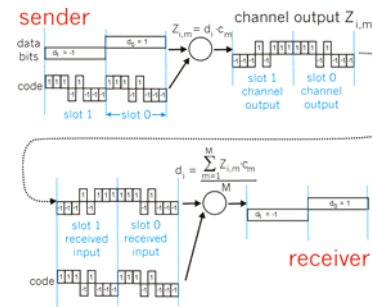

Week 5: DataLink Layer 5a-20

CDMA: two-sender interference

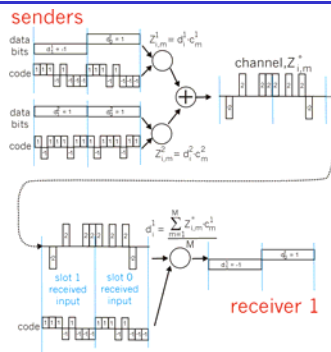

Week 5: DataLink Layer 5a-21

Random Access Protocols

- When node has packet to send
 - transmit at full channel data rate R.
 - no *a priori* coordination among nodes
- two or more transmitting nodes \rightarrow "collision",
- random access MAC protocol** specifies:
 - how to detect collisions
 - how to recover from collisions (e.g., via delayed retransmissions)
- Examples of random access MAC protocols:
 - slotted ALOHA
 - ALOHA
 - CSMA, CSMA/CD, CSMA/CA

Week 5: DataLink Layer 5a-22

Slotted ALOHA

Assumptions


- all frames same size
- time is divided into equal size slots, time to transmit 1 frame
- nodes start to transmit frames only at beginning of slots
- nodes are synchronized
- if 2 or more nodes transmit in slot, all nodes detect collision

Operation

- when node obtains fresh frame, it transmits in next slot
- no collision, node can send new frame in next slot
- if collision, node retransmits frame in each subsequent slot with prob. p until success

Week 5: DataLink Layer 5a-23

Slotted ALOHA

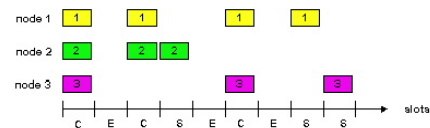

Pros

- single active node can continuously transmit at full rate of channel
- highly decentralized: only slots in nodes need to be in sync
- simple

Cons

- collisions, wasting slots
- idle slots
- nodes may be able to detect collision in less than time to transmit packet

Week 5: DataLink Layer 5a-24

Slotted Aloha efficiency

Efficiency is the long-run fraction of successful slots when there are many nodes, each with many frames to send

- Suppose N nodes with many frames to send, each transmits in slot with probability p

- prob that 1st node has success in a slot = $p(1-p)^{N-1}$

- prob that any node has a success = $Np(1-p)^{N-1}$

- For max efficiency with N nodes, find p^* that maximizes $Np(1-p)^{N-1}$

- For many nodes, take limit of $Np^*(1-p^*)^{N-1}$ as N goes to infinity, gives $1/e = .37$

At best: channel used for useful transmissions 37% of time!

Week 5: DataLink Layer 5a-25

Pure (unslotted) ALOHA


- unslotted Aloha: simpler, no synchronization

- when frame first arrives

- transmit immediately

- collision probability increases:

- frame sent at t_0 collides with other frames sent in $[t_0-1, t_0+1]$

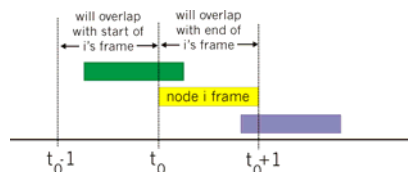

Week 5: DataLink Layer 5a-26

Pure Aloha efficiency

$P(\text{success by given node}) = P(\text{node transmits}) \cdot$

$P(\text{no other node transmits in } [p_0-1, p_0]) \cdot$

$P(\text{no other node transmits in } [p_0-1, p_0])$

$= p \cdot (1-p)^{N-1} \cdot (1-p)^{N-1}$

$= p \cdot (1-p)^{2(N-1)}$

... choosing optimum p and then letting $n \rightarrow \infty$...

Even worse ! $= 1/(2e) = .18$

Week 5: DataLink Layer 5a-27

CSMA (Carrier Sense Multiple Access)

CSMA: listen before transmit:

- If channel sensed idle: transmit entire frame

- If channel sensed busy, defer transmission

- Human analogy: don't interrupt others!


Week 5: DataLink Layer 5a-28

CSMA collisions

collisions can still occur:
propagation delay means two nodes may not hear each other's transmission

collision:
entire packet transmission time wasted

note:
role of distance & propagation delay in determining collision probability

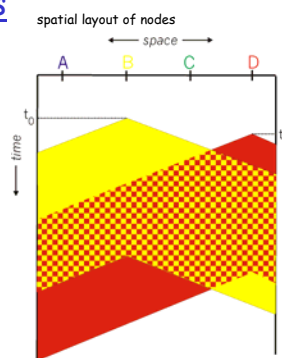

Week 5: DataLink Layer 5a-29

CSMA/CD (Collision Detection)

CSMA/CD: carrier sensing, deferral as in CSMA

- collisions *detected* within short time
- colliding transmissions aborted, reducing channel wastage


- collision detection:

- easy in wired LANs: measure signal strengths, compare transmitted, received signals
- difficult in wireless LANs: receiver shut off while transmitting

- human analogy: the polite conversationalist

Week 5: DataLink Layer 5a-30

CSMA/CD collision detection

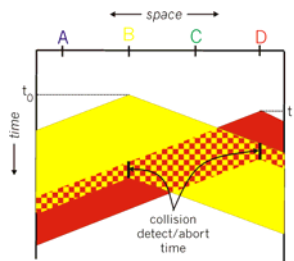

Week 5: DataLink Layer 5a-31

"Taking Turns" MAC protocols

channel partitioning MAC protocols:

- share channel efficiently and fairly at high load
- inefficient at low load: delay in channel access, 1/N bandwidth allocated even if only 1 active node!

Random access MAC protocols

- efficient at low load: single node can fully utilize channel
- high load: collision overhead

"taking turns" protocols

look for best of both worlds!

Week 5: DataLink Layer 5a-32


"Taking Turns" MAC protocols

Polling:

- master node "invites" slave nodes to transmit in turn
- concerns:
 - polling overhead
 - latency
 - single point of failure (master)

Token passing:

- control **token** passed from one node to next sequentially.
- token message
- concerns:
 - token overhead
 - latency
 - single point of failure (token)



Week 5: DataLink Layer 5a-33

Summary of MAC protocols

□ What do you do with a shared media?

- Channel Partitioning, by time, frequency or code
 - Time Division, Code Division, Frequency Division
- Random partitioning (dynamic),
 - ALOHA, S-ALOHA, CSMA, CSMA/CD
 - carrier sensing: easy in some technologies (wire), hard in others (wireless)
 - CSMA/CD used in Ethernet
- Taking Turns
 - polling from a central site, token passing

Week 5: DataLink Layer 5a-34


LAN technologies

Data link layer so far:

- services, error detection/correction, multiple access

Next: LAN technologies

- addressing
- Ethernet
- hubs, bridges, switches
- 802.11
- PPP
- ATM

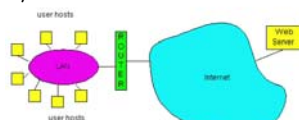

Week 5: DataLink Layer 5a-35

LAN Addresses and ARP

32-bit IP address:

- *network-layer* address
- used to get datagram to destination IP network (recall IP network definition)


LAN (or MAC or physical or Ethernet) address:

- used to get datagram from one interface to another physically-connected interface (same network)
- 48 bit MAC address (for most LANs) burned in the adapter ROM

Week 5: DataLink Layer 5a-36

LAN Addresses and ARP

Each adapter on LAN has unique LAN address

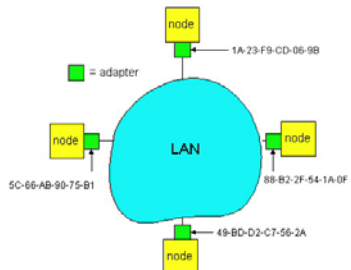

Week 5: DataLink Layer 5a-37

LAN Address (more)


- MAC address allocation administered by IEEE
- manufacturer buys portion of MAC address space (to assure uniqueness)
- Analogy:
 - (a) MAC address: like Social Security Number
 - (b) IP address: like postal address
- MAC flat address => portability
 - can move LAN card from one LAN to another
- IP hierarchical address NOT portable
 - depends on IP network to which node is attached

Week 5: DataLink Layer 5a-38

Recall earlier routing discussion

Starting at A, given IP datagram addressed to B:

- look up net. address of B, find B on same net. as A
- link layer send datagram to B inside link-layer frame

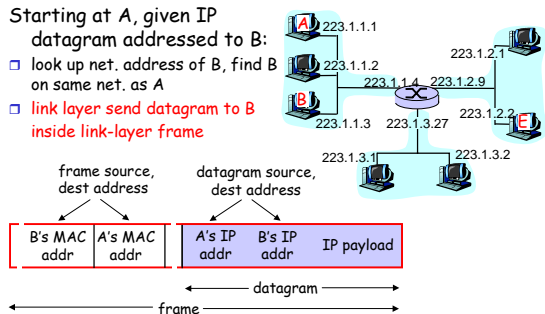


Week 5: DataLink Layer 5a-39

ARP: Address Resolution Protocol

Question: how to determine MAC address of B knowing B's IP address?

- Each IP node (Host, Router) on LAN has ARP table
- ARP Table: IP/MAC address mappings for some LAN nodes
 - < IP address; MAC address; TTL >
 - TTL (Time To Live): time after which address mapping will be forgotten (typically 20 min)

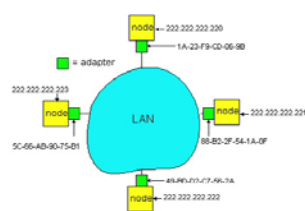

Week 5: DataLink Layer 5a-40


ARP protocol

- A wants to send datagram to B, and A knows B's IP address.
- Suppose B's MAC address is not in A's ARP table.
- A broadcasts ARP query packet, containing B's IP address
 - all machines on LAN receive ARP query
- B receives ARP packet, replies to A with its (B's) MAC address
 - frame sent to A's MAC address (unicast)
- A caches (saves) IP-to-MAC address pair in its ARP table until information becomes old (times out)
 - soft state: information that times out (goes away) unless refreshed
- ARP is "plug-and-play":
 - nodes create their ARP tables without intervention from net administrator

Week 5: DataLink Layer 5a-41

Routing to another LAN


walkthrough: send datagram from A to B via R
assume A knows B IP address

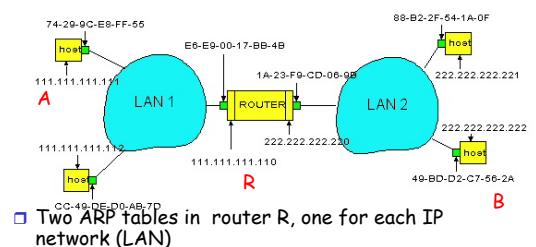

- Two ARP tables in router R, one for each IP network (LAN)

Week 5: DataLink Layer 5a-42

- A creates datagram with source A, destination B
- A uses ARP to get R's MAC address for 111.111.111.110
- A creates link-layer frame with R's MAC address as dest, frame contains A-to-B IP datagram
- A's data link layer sends frame
- R's data link layer receives frame
- R removes IP datagram from Ethernet frame, sees its destined to B
- R uses ARP to get B's physical layer address
- R creates frame containing A-to-B IP datagram sends to B

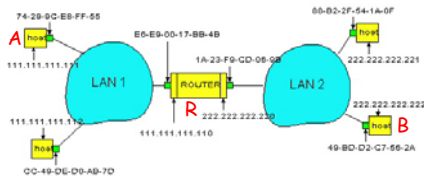


yer 5a-43

Ethernet

"dominant" LAN technology:

- cheap \$20 for 100Mbps!
- first widely used LAN technology
- Simpler, cheaper than token LANs and ATM
- Kept up with speed race: 10, 100, 1000 Mbps

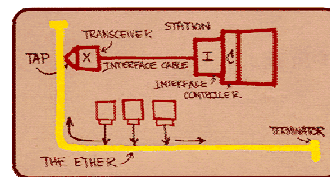

Metcalfe's Ethernet sketch

Week 5: DataLink Layer 5a-44

Ethernet Frame Structure

Sending adapter encapsulates IP datagram (or other network layer protocol packet) in **Ethernet frame**



Preamble:

- 7 bytes with pattern 10101010 followed by one byte with pattern 10101011
- used to synchronize receiver, sender clock rates

Week 5: DataLink Layer 5a-45

Ethernet Frame Structure (more)

- **Addresses:** 6 bytes
 - if adapter receives frame with matching destination address, or with broadcast address (eg ARP packet), it passes data in frame to net-layer protocol
 - otherwise, adapter discards frame
- **Type:** indicates the higher layer protocol, mostly IP but others may be supported such as Novell IPX and AppleTalk)
- **CRC:** checked at receiver, if error is detected, the



Week 5: DataLink Layer 5a-46

Unreliable, connectionless service

- **Connectionless:** No handshaking between sending and receiving adapter.
- **Unreliable:** receiving adapter doesn't send acks or nacks to sending adapter
 - stream of datagrams passed to network layer can have gaps
 - gaps will be filled if app is using TCP
 - otherwise, app will see the gaps

Week 5: DataLink Layer 5a-47

Ethernet uses CSMA/CD

- No slots
- adapter doesn't transmit if it senses that some other adapter is transmitting, that is, **carrier sense**
- transmitting adapter aborts when it senses that another adapter is transmitting, that is, **collision detection**
- Before attempting a retransmission, adapter waits a random time, that is, **random access**

Week 5: DataLink Layer 5a-48

Ethernet CSMA/CD algorithm

1. Adaptor gets a datagram from and creates frame
2. If adaptor senses channel idle, it starts to transmit frame. If it senses channel busy, waits until channel idle and then transmits
3. If adaptor transmits entire frame without detecting another transmission, the adaptor is done with frame!
4. If adaptor detects another transmission while transmitting, aborts and sends jam signal
5. After aborting, adaptor enters **exponential backoff**: after the mth collision, adaptor chooses a K at random from $\{0, 1, 2, \dots, 2^m - 1\}$. Adaptor waits $K \times 512$ bit times and returns to Step 2

Week 5: DataLink Layer 5a-49

Ethernet's CSMA/CD (more)

Jam Signal: make sure all other transmitters are aware of collision; 48 bits;
Bit time: 1 microsec for 10 Mbps Ethernet ; for K=1023, wait time is about 50 msec

Exponential Backoff:

- **Goal:** adapt retransmission attempts to estimated current load
 - heavy load: random wait will be longer
- first collision: choose K from $\{0, 1\}$; delay is $K \times 512$ bit transmission times
- after second collision: choose K from $\{0, 1, 2, 3\}$...
- after ten collisions, choose K from $\{0, 1, 2, 3, 4, \dots, 1023\}$

See/interact with Java applet on AWL Web site:
http://wps.aw.com/aw_kurose_network_3/0,9212,1406346-,00.html

Week 5: DataLink Layer 5a-50

CSMA/CD efficiency

- T_{prop} = max prop between 2 nodes in LAN
- t_{trans} = time to transmit max-size frame


$$\text{efficiency} = \frac{1}{1 + 5t_{prop} / t_{trans}}$$

- Efficiency goes to 1 as t_{prop} goes to 0
- Goes to 1 as t_{trans} goes to infinity
- Much better than ALOHA, but still decentralized, simple, and cheap

Week 5: DataLink Layer 5a-51

Ethernet Technologies: 10Base2

- 10: 10Mbps; 2: under 200 meters max cable length
- thin coaxial cable in a bus topology

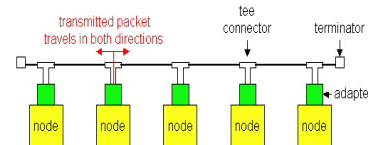


- repeaters used to connect up to multiple segments
- repeater repeats bits it hears on one interface to its other interfaces: physical layer device only!
- has become a legacy technology

Week 5: DataLink Layer 5a-52

10BaseT and 100BaseT

- 10/100 Mbps rate; latter called "fast ethernet"
- T stands for Twisted Pair
- Nodes connect to a hub: "star topology"; 100 m max distance between nodes and hub



- Hubs are essentially physical-layer repeaters:
 - bits coming in one link go out all other links
 - no CSMA/CD at hub: adapters detect collisions
 - provides net management functionality

Week 5: DataLink Layer 5a-53

Gbit Ethernet

- use standard Ethernet frame format
- allows for point-to-point links and shared broadcast channels
- in shared mode, CSMA/CD is used; short distances between nodes to be efficient
- uses hubs, called here "Buffered Distributors"
- Full-Duplex at 1 Gbps for point-to-point links
- 10 Gbps now !

Week 5: DataLink Layer 5a-54


Interconnecting LAN segments

- ❑ Hubs
- ❑ Bridges
- ❑ Switches
 - Remark: switches are essentially multi-port bridges.
 - What we say about bridges also holds for switches!

Week 5: DataLink Layer 5a-55

Interconnecting with hubs

- ❑ Backbone hub interconnects LAN segments
- ❑ Extends max distance between nodes
- ❑ But individual segment collision domains become one large collision domain
 - if a node in CS and a node EE transmit at same time: collision
- ❑ Can't interconnect 10BaseT & 100BaseT

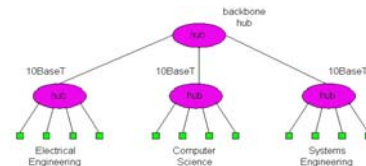

Week 5: DataLink Layer 5a-56


Bridges

- ❑ Link layer device
 - stores and forwards Ethernet frames
 - examines frame header and **selectively** forwards frame based on MAC dest address
 - when frame is to be forwarded on segment, uses CSMA/CD to access segment
- ❑ transparent
 - hosts are unaware of presence of bridges
- ❑ plug-and-play, self-learning
 - bridges do not need to be configured

Week 5: DataLink Layer 5a-57

Ethernet Switches

- ❑ Essentially a multi-interface bridge
- ❑ layer 2 (frame) forwarding, filtering using LAN addresses
- ❑ Switching: A-to-A' and B-to-B' simultaneously, no collisions
- ❑ large number of interfaces
- ❑ often: individual hosts, star-connected into switch
 - Ethernet, but no collisions!

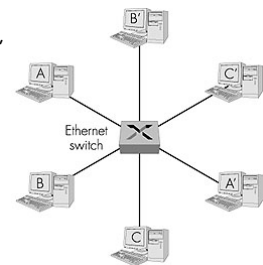

Week 5: DataLink Layer 5a-58

Ethernet Switches

- ❑ **cut-through switching**: frame forwarded from input to output port without awaiting for assembly of entire frame
 - slight reduction in latency
- ❑ combinations of shared/dedicated, 10/100/1000 Mbps interfaces

Week 5: DataLink Layer 5a-59

Summary comparison

	<u>hubs</u>	<u>bridges</u>	<u>routers</u>	<u>switches</u>
traffic	no	yes	yes	yes
isolation				
plug & play	yes	yes	no	yes
optimal routing	no	no	yes	no
cut through	yes	no	no	yes

Week 5: DataLink Layer 5a-60


IEEE 802.11 Wireless LAN

- ❑ **802.11b**
 - 2.4-5 GHz unlicensed radio spectrum
 - up to 11 Mbps
 - direct sequence spread spectrum (DSSS) in physical layer
 - all hosts use same chipping code
 - widely deployed, using base stations
- ❑ **802.11a**
 - 5-6 GHz range
 - up to 54 Mbps
- ❑ **802.11g**
 - 2.4-5 GHz range
 - up to 54 Mbps
- ❑ All use CSMA/CA for multiple access
- ❑ All have base-station and ad-hoc network versions

Week 5: DataLink Layer 5a-61

Base station approach

- ❑ Wireless host communicates with a base station
 - base station = access point (AP)
- ❑ **Basic Service Set (BSS)** (a.k.a. "cell") contains:
 - wireless hosts
 - access point (AP): base station
- ❑ BSS's combined to form distribution system (DS)



Week 5: DataLink Layer 5a-62

Ad Hoc Network approach

- ❑ No AP (i.e., base station)
- ❑ wireless hosts communicate with each other
 - to get packet from wireless host A to B may need to route through wireless hosts X,Y,Z
- ❑ Applications:
 - "laptop" meeting in conference room, car
 - interconnection of "personal" devices
 - battlefield
- ❑ IETF MANET (Mobile Ad hoc Networks) working group



Week 5: DataLink Layer 5a-63